


THE VAN ACCESSIBLE SIGN SHALL BE MOUNTED 60" MINIMUM ABOVE THE FINISH FLOOR OR GROUND SURFACE MEASURED TO THE SIGN BOTTOM AND ALL HANDICAP SYMBOLS MUST BE WHITE ON A BLUE BACKGROUND

ACCESSIBLE PARKING STALLS MUST BE  $\bf MIN.$  13FT. X 18FT. FOR CARS AND 16FT. X 18FT. FOR VANS AND HAVE POSTED HANDICAPPED SIGNS OR AS INDICATED.

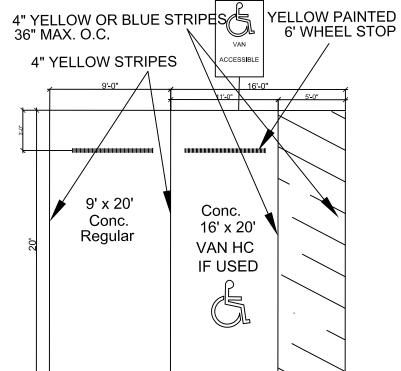

## PARKING LOT DETAILS (NTS)

SUMMARY OF QUANTITIES		
Descriptions	Units	Quantities
Removal of Concrete Built-up	Lump Sum	Lump Sum
Removal of Concrete Ramp & Walkway	Lump Sum	Lump Sum
Removal/Relocation of wheel stops	Each	3
Required 6" Thick Concrete Step	Sqyd	1.2
Required 4" Thick Concrete Walk	Sqyd	6
Saw-cutting Concrete	LnFt	6
4" Stripes	LnFt	90
Handicap Parking Symbols	Each	4
Handicap Parking Accessible Signs	Each	2
3' High x 5' Long Hand Railing	LnFt	5
3' High x 13' Long Hand Railing	LnFt	13

ALL PARKING SPACES SHALL BE CLEARLY AND PERMANENTLY MARKED ACCORDINGLY.

**EXIST. SITE PLAN** Scale: |" = 20'-0" on || x |7 sheet Scale: |" = 10'-0" on 24 x 36 sheet



